

Roofing Colour Chart



Colour options - XRW grade

Colorbond®	Equivalent	Colorbond®	Equivalent
Zincalume®	Zinc/Al	Dune®	Birch
Classic Cream™	Smooth Cream	Cove™	River Reed
Paperbark®	Merino	Windspray®	Armour Grey
Pale Eucalypt®	Mist Green	Gully™	Driftwood
Woodland Grey®	Slate Grey	Mangrove®	Wild Sage
Deep Ocean®	Mountain Blue	Wallaby®	Cobblestone
Cottage Green®	Caulfield Green	Jasper®	Banyan Brown
Manor Red®	Heritage Red	Basalt®	Granite
Night Sky®	Ebony	Ironstone®	Dark Stone
Surfmist®	Off White	Terrain®	Red Dust
Evening Haze®	Moss Vale Sand	Monument®	Gun Metal Grey
Shale Grey™	Gull Grey		

Colour options - Ultragrade

Wallaby
Surfmist®
Dune®
Windspray®
Monument®
Woodland Grey®

Stainless steel


Surfmist®

Roofing colours

When selecting colours it is important to realise that printing and computer screens may not accurately represent the intended colour accurately and should be used as a guide only. The Colorbond® colour names are registered trademarks of BlueScope Steel Limited. Ask your Landmark Consultant for the best roofing options for your project.

Roofing Colour Chart

Structural insulated panel	
Topside	Underside
Off White	Off White
Smooth Cream	Alpine®
Merino	Sand Dune®
Gull Grey	Desert™
Birch	
Mist Green	
Armour Grey	
Banyan Brown®	
Slate Grey	
Heritage Red	
Deep Ocean	

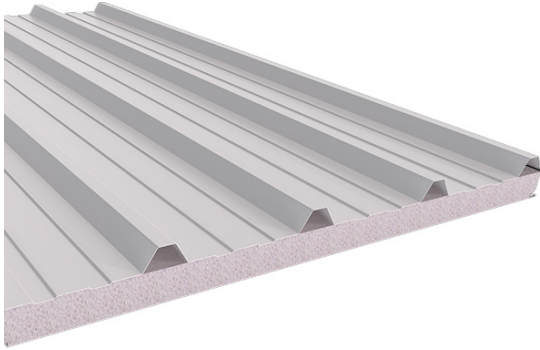

Maintaining Colorbond® & Zinalume® Steel

Simple maintenance of Colorbond® steel and Zinalume® steel by regular washing with water will not only enhance its life but maintain its attractiveness for longer periods thus protecting your asset.

Applications where the paint finish is automatically washed by rainwater do not usually require this maintenance, e.g. roof cladding. Examples of applications requiring maintenance cleaning include wall cladding under eaves, and the underside of eave gutters.

Areas not regularly washed by rainwater should be hosed down at least every six months and more frequently in coastal areas where marine salt spray is prevalent, and in areas where high levels of industrial fallout occur.

In cases where the regular maintenance referred to above does not remove all dirt which may have adhered to the surface of the paint, the following procedure should be carried out:

Wash the surface with a mild solution of pure soap or mild non-abrasive kitchen detergent in warm water.

Application should be with a sponge, soft cloth or soft bristle nylon brush, and should be gentle to prevent shiny spots.

The Colorbond® steel and Zinalume® steel should be thoroughly rinsed with clean water immediately after cleaning to remove traces of detergent.

Never use abrasive or solvent type cleaners (turpentine, petrol, kerosene, paint thinners) on Colorbond® steel and Zinalume® steel.

If cared for in accordance with these instructions, your building components made from Colorbond® pre-painted steel and Zinalume® steel will give many years of low maintenance life.

This information is intended as a guide only. Additional technical information can be obtained from the Colorbond website at:

www.bluescopesteel.com.au

Colorbond®, BlueScope and ® colour names are registered trade marks of BlueScope Steel Limited. TM colour names are trade marks of BlueScope Steel Limited.